MAGICART

企业文化

使命： 提升客户的事业

愿景：

- 打造世界顶级团队和创业孵化平台
- 成为一家充满大爱、自由和创造力的公司，让每个人都能心灵开阔、工作充实、生活幸福。

价值观：

- 尊重生命、保障人权、言而有信、勇于担当
- 做一个正直的、值得信任的人
- 改变自己，以创造崭新的、快乐的人生

理念：

- 提供能满足客户真实需求的好产品
- 积极培养和选拔那些勇于挑战的、勤奋的、责任心强的员工，帮助他们快速晋升
- 领导必须身先士卒、主动改变、成为团队成员成长的榜样

精神：

- 战胜强敌、拥抱勇者



Cultures

Mission： Promote client's business!

Vision:

- Build a world-class team and an entrepreneurship incubation platform.
- To be a company full of great love, freedom and creativity, to make everyone have an open mind, fulfilling job, and a happy life.

Value:

- Respect Life, Protect Human Rights, Keep Promise, Take Responsibility.
- Be upright and trustworthy.
- Change yourself to build a new and happy life.

Philosophy:

- Provide quality products to meet client's real needs
- Actively develop and select courageous, diligent, responsible employees to help them advance rapidly.
- Leaders must lead by example, embrace change, and model team growth.

Spirit:

- Defeat the formidable, Embrace the brave!

轮胎吊系列产品
(RTG Crane) Mobile Gantry Crane series

新乡市魔工起重机有限公司
XINXIANG MAGICART CRANES CO., LTD
info@magicartcranes.com
Tel: +86 173 3736 9287 www.magicartcranes.com

关于我们 ABOUT US

魔工 是领先的起重机及物料搬运设备的专业制造商和服务供应商，致力于起重机及物料搬运技术的研发、设计、制造、安装和服务。

魔工产品系列全、质量可靠、性能优异，服务高效，产品遍布全球八十多个国家和地区。广泛应用于装备制造、物流、能源、电力、船舶、冶金、港口、基建、金属加工、水电站、汽车制造、航空航天等二十多个专业领域。

魔工的产品主要有轮胎吊、液压龙门吊、游艇吊、浮船坞起重机、门座式起重机、坞臂车、桥式起重机、门式起重机、悬臂吊、吊具、电动葫芦、定制化的起重设备及配套件。经过长期的技术创新，我们已为客户节省了大量购机成本和生命周期运营成本。

魔工将通过长期不懈的努力为客户提供性价比最佳的产品，来践行自己的使命：

提升客户的事业！

MAGICART is a leading manufacturer and service provider of cranes and material handling equipment, dedicated to the R & D, design, manufacturing, installation and service of cranes and material handling technology.

MAGICART owns comprehensive products, reliable quality, excellent performance, efficient service. The products are distributed in more than 80 countries and regions around the world. It is widely used in more than 20 professional fields, such as equipment manufacturing, logistics, energy, electric power, shipbuilding, metallurgy, ports, infrastructure, metal processing, hydropower stations, automobile manufacturing, and aerospace.

MAGICART's main products are RTG crane, Hydraulic gantries, Boat Hoist, Floating Dock crane, Portal Jib crane, Dock Arm, Overhead crane, Gantry crane, Jib crane, Lifting Spreader, Electric hoist, customized crane system and lifting accessories. MAGICART has saved customers huge cost in machine purchase and life cycle operating after long-term technological innovation.

Through long-term unremitting efforts , MAGICART will provide clients with the best cost -effective products to fulfill its mission: promote client's business!

目录 **Index**

P01 产品应用

P03 单梁轮胎吊 F/ FR 型号

P05 双梁双吊钩轮胎吊-DB 型号

P07 双梁长吊具轮胎吊 -BS 型号

P09 侧面起升轮胎吊 - BH 型号

P10 集装箱跨运车 - EL 型号

P11 双梁轮胎吊 - GRT 型号

P13 定制化起升系统

P14 定制化的伸缩设计

P14 电动便携式龙门吊

P01 Application

P03 Single Beam RTG Crane - F/FR Model

P05 Double Beam RTG Crane –DB model

P07 Double Beam RTG Crane with Spreader - BS model

P09 Side Lifting RTG Crane - BH model

P10 Container Straddle Carrier - EL model

P11 Double Girder RTG Crane - GRT model

P13 Customized Lifting System

P14 Customized Telescopic Design

P14 Electric Portable Gantry - Economic choice

产 品 应 用
APPLICATION

- 航空制造 Aeronautical manufacturing
- 工程机械制造 Construction machinery
- 物流园区 Logistics zone
- 预制梁 Precast concrete beam
- 风电厂 Wind power plant
- 工厂吊装 Factory lift





















产 品 应 用
APPLICATION

- 船厂码头 Shipyard & marina
- 集装箱堆场 Container yard
- 混凝土模块 Concrete element
- 钢铁制品 Steel products
- 管件和设备 Pipe & equipment
- 电气设备 Electric equipment
- 特殊产品 Special irregular product


>>> 单梁轮胎吊 - F / FR 型号
Single Beam RTG Crane - F / FR model

◆ 型号说明 Model Code

F/FR 20t - 6m - 6m A5

- A5 — 工作级别 Crane Class（ISO/GB/FEM）
- 6m — 起升高度 Lifting Height
- 6m — 跨度 Span
- 20t — 起重量 Lifting Capacity（SWL）
- F/FR — 无坡度型号 No slope model / 爬坡型号 Model with gradeability

◆ 尺寸布局图 Layout Drawing

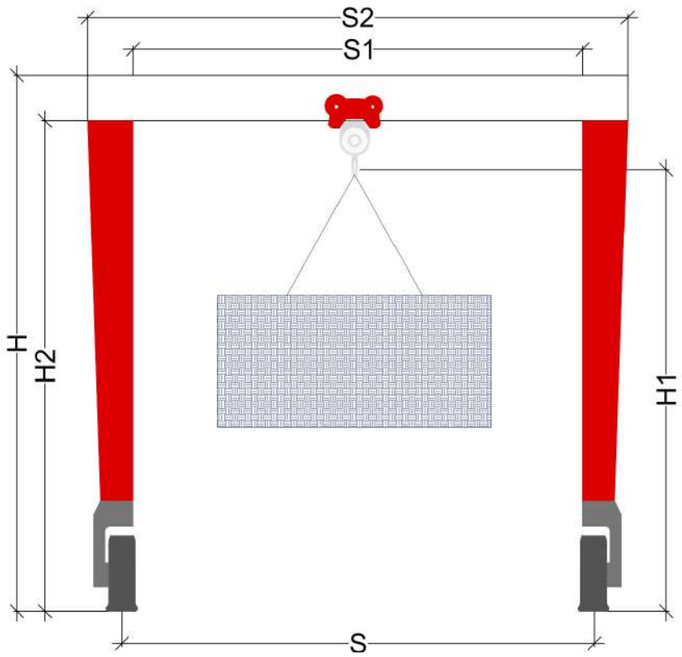

>>> 报价所需的必备信息 Info needed from client for offer			>>>更多有效信息（如有） More info needed from client if available		
SWL	额定载荷	Lifting capacity	S	跨度	Span
S1	净宽	Clear Width	S2	总宽度	Overall Width
H1	最大起升高度	Max. Lifting Height	H	总高度	Overall Height
V/Hz/Ph	供电电压	Power Voltage	/	地面坡度	Ground Slope____%
/	是否进出大门	Pass through a Gate or not?	/	地面材料（混凝土/沥青/夯实的土地？）	Ground material (concrete or asphalt or compacted soil?)
Unit	起重机数量	Quantity of crane	/	操作方式: 遥控/司机室	Operation: Remote control or Cabin

>>> 技术特点及参数表 Technical Features & Data Sheet

产品特征

- **单梁吊钩结构**
- 额定载荷 5t~100t
- 灵活的可移动性，容易通过工厂车间大门
- 宽度、高度的定制设计
- 全液压系统
- 遥控控制
- 柴油发动机提供动力
- 选项
- 驱动类型：电动系统
  - 爬坡能力：1%~ 4% (可定制)
  - 电缆接入
  - 驾驶室操作





Features

- **Single Beam with hook**
- Capacity from 5 t ~ 100 t
- High mobility
- Easy to go through the gate of workshop
- Customized design for width, height
- Full hydraulic system
- Grade-ability: 1%~ 4% (customized)
- Diesel engine power
- Wireless control
- **Option**
  - Drive type: electric system
  - Grade-ability: 1%~ 4% (customized)
  - Electric cable access

无坡度型号 Model (no slope)	爬坡型号 Model with gradeability	载荷 Capacity	净高 Clear Height	净宽 Clear Width
F 5	FR 5	5T	3m ~ 12m	3m~15m
F 10	FR 10	10T	2m ~ 12m	3m ~ 15m
F 20	FR 20	20T	2m ~ 12m	3m ~ 15m
F 30	FR 30	30T	2m ~ 12m	3m ~ 15m
F 40	FR 40	40T	2.5m ~ 12m	3m ~ 15m
F 50	FR 50	50T	2.5m ~ 15m	3m ~ 20m
/	FR 70	70T	2.5m ~ 15m	3m ~ 20m
/	FR 90	90T	2.5m ~ 15m	3m ~ 20m
/	FR 100	100T	2.5m ~ 15m	3m ~ 15m
/	/	可定制 Customized	可定制 Customized	可定制 Customized

MAGICART


>>> 双梁双吊钩轮胎吊 - DB 型号
Double Beam RTG Crane - DB model

◆ 型号说明 Model Code

DB 100t (50+50) - 12m - 9m A5

- A5 — 工作级别 Crane Class（ISO/GB/FEM）
- 9m — 起升高度 Lifting Height
- 12m — 跨度 Span
- 100t (50+50) — 起重量 Lifting Capacity（SWL）
- DB — DB 双梁 Double Beam

◆ 尺寸布局图 Layout Drawing

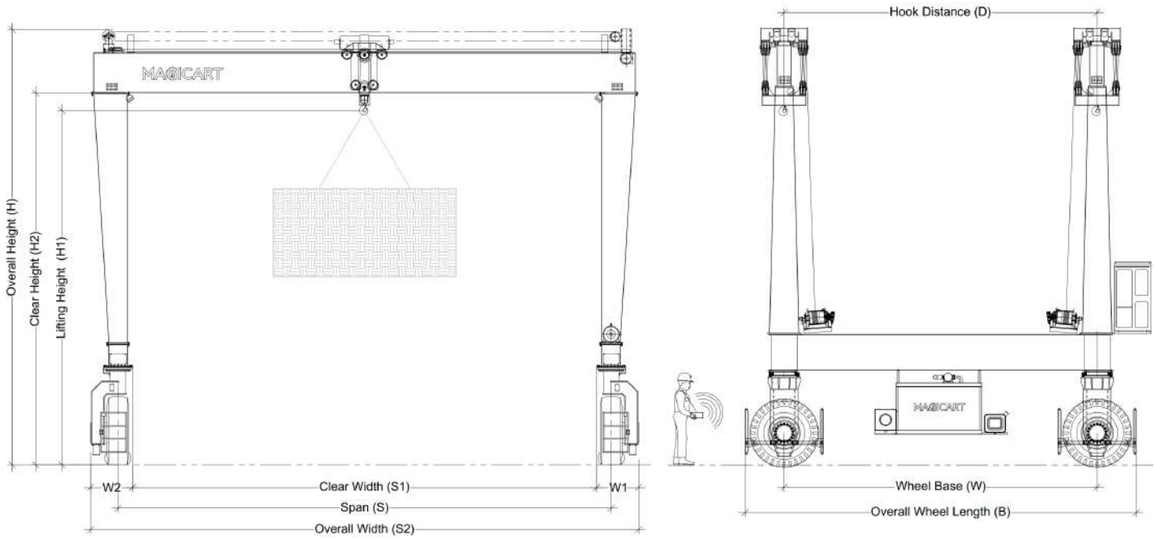

>>> 报价所需的必备信息 Info needed from client for offer			>>>更多有效信息（如有） More info needed from client if available		
SWL	额定载荷	Lifting capacity	S	跨度	Span
S1	净宽	Clear Width	S2	总宽度	Overall Width
H1	最大起升高度	Max. Lifting Height	H	总高度	Overall Height
D	吊钩间距	Hook Distance	/	地面坡度	Ground Slope____%
V/Hz/Ph	供电电压	Power Voltage	/	地面材料（混凝土/沥青/夯实的土地？）	Ground material (concrete or asphalt or compacted soil?)
Unit	起重机数量	Quantity of crane	/	操作方式: 遥控/司机室	Operation: Remote control or Cabin

MAGICART

>>> 技术特点及参数表 Technical Features & Data Sheet



产品特征

- **双梁双吊钩结构**
- 适用各种物料起吊、长度或宽度较大的物品
- 灵活的可移动性，可在工厂和车间自由穿梭
- 起吊、运输等多种用途
- 宽度，高度的定制设计
- 载荷从 10t - 400t
- 全液压系统 或全 电动系统
- 柴油发动机供电 /可选电缆接入
- 驾驶室控制，可配无线遥控器

Features

- **Double beam with two hooks**
- Designed for Longitudinal material & Various object
- High mobility to move in yard, even go through a workshop gate
- Multi-purpose for lifting & transportation
- Customized design for Width, Height
- Capacity from 10 t ~ 400 t
- Full hydraulic system or electric system
- Diesel engine power/optional for cable access
- Cabin operation or wireless control



型号 Model	载荷 Capacity	净高 Clear Height	净宽 Clear Width
DB 10	10T	2m ~ 9m	3m ~ 12m
DB 20	20T	2m ~ 9m	3m ~ 12m
DB 30	30T	2m ~ 9m	3m ~ 12m
DB 50	50T	2m ~ 9m	3m ~ 15m
DB 70	70T	2.5m ~ 12m	3m ~ 15m
DB 100	100T	2.5m ~ 12m	3m ~ 15m
DB 150	150T	3m ~ 15m	3m ~ 18m
DB 200	200T	3m ~ 15m	3m ~ 18m
DB 250	250T	3m ~ 15m	3m ~ 18m
DB 300	300T	5m ~ 20m	5m ~ 25m
DB 400	400T	5m ~ 20m	5m ~ 25m
可定制 Customized	可定制 Customized	可定制 Customized	可定制 Customized


>>> 双梁长吊具轮胎吊 - BS 型号
Double Beam RTG Crane with Spreader - BS model

◆ 型号说明 Model Code

BS 100t (50+50) - 12m - 9m A5

- A5 — 工作级别 Crane Class（ISO/GB/FEM）
- 9m — 起升高度 Lifting Height
- 12m — 跨度 Span
- 100t (50+50) — 起重量 Lifting Capacity（SWL）
- BS — BS 双梁长吊具 Double Beam with Spreader

◆ 尺寸布局图 Layout Drawing

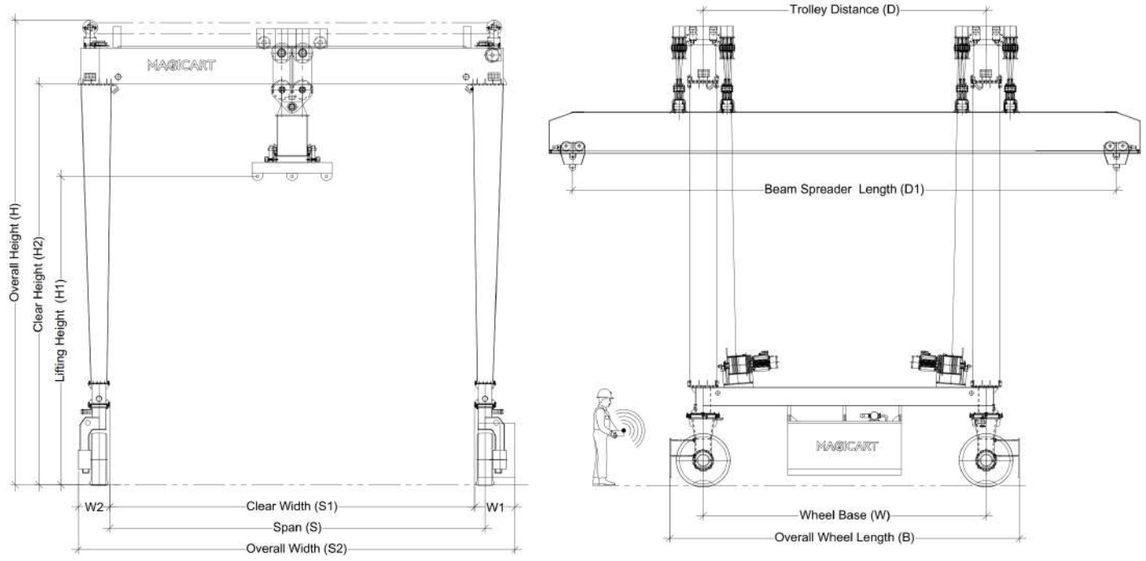

>>> 报价所需的必备信息 Info needed from client for offer			>>>更多有效信息（如有） More info needed from client if available		
SWL	额定载荷	Lifting capacity	S	跨度	Span
S1	净宽	Clear Width	S2	总宽度	Overall Width
H1	最大起升高度	Max. Lifting Height	H	总高度	Overall Height
D1	吊具长度	Spreader Length	D	小车间距	Trolley Distance
/	吊装物料介绍	Lifting material details	/	地面坡度	Ground Slope____%
V/Hz/Ph	供电电压	Power Voltage	/	地面材料（混凝土/ 沥青/夯实的土地？）	Ground material (concrete or asphalt or compacted soil?)
Unit	起重机数量	Quantity of crane	/	操作方式: 遥控/司机室	Operation: Remote control or Cabin

>>> 技术特点及参数表 Technical Features & Data Sheet

产品特征

- **双梁长吊具结构**
- 适用各种物料起吊、长度或宽度较大的物品
- 灵活的可移动性，可在工厂和车间自由穿梭
- 起吊、运输等多种用途
- 宽度，高度的定制设计
- 载荷从 10吨~400吨
- 全液压系统 或 全电动系统
- 柴油发动机供电 /可选电缆接入
- 驾驶室控制，可配无线遥控器





Features

- **Double Beam with beam spreader**
- Designed for Longitudinal material & Various object
- High mobility to move in yard, even go through a workshop gate
- Multi-purpose for lifting & transportation
- Customized design for Width, Height
- Capacity from 10 t ~ 400 t
- Full hydraulic system or electric system
- Diesel engine power/optional for cable access
- Cabin operation or wireless control

型号 Model	载荷 Capacity	净高 Clear Height	净宽 Clear Width
BS 10	10T	2m ~ 9m	3m ~ 12m
BS 20	20T	2m ~ 9m	3m ~ 12m
BS 30	30T	2m ~ 9m	3m ~ 12m
BS 50	50T	2m ~ 9m	3m ~ 15m
BS 70	70T	2.5m ~ 12m	3m ~ 15m
BS 100	100T	2.5m ~ 12m	3m ~ 15m
BS 150	150T	3m ~ 15m	3m ~ 18m
BS 200	200T	3m ~ 15m	3m ~ 18m
BS 250	250T	3m ~ 15m	3m ~ 18m
BS 300	300T	5m ~ 20m	5m ~ 25m
BS 400	400T	5m ~ 20m	5m ~ 25m
可定制 Customized	可定制 Customized	可定制 Customized	可定制 Customized


>>> 侧面起升轮胎吊 - BH 型号
Side Lifting RTG Crane - BH model


◆ 型号说明 Model Code

BH 200t - 12m - 9m A3

- A3 — 工作级别 Crane Class（ISO/GB/FEM）
- 9m — 起升高度 Lifting Height
- 12m — 跨度 Span
- 200t — 起重量 Lifting Capacity（SWL）
- BH — BH 侧面起升轮胎吊 Side Lifting RTG Crane

◆ 尺寸布局图 Layout Drawing

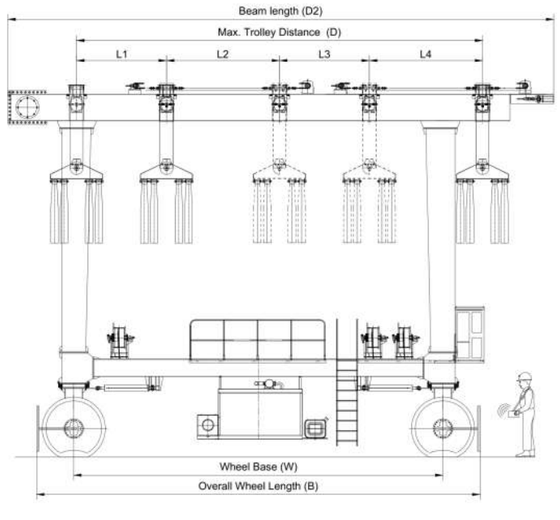

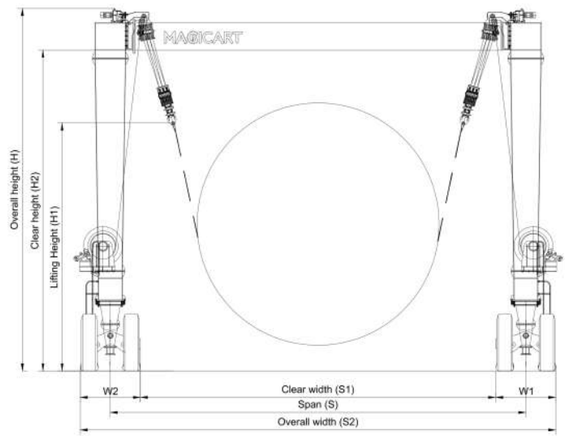

>>> 报价所需的必备信息 Info needed from client for offer			>>>更多有效信息（如有） More info needed from client if available		
SWL	额定载荷	Lifting capacity	S	跨度	Span
S1	净宽	Clear Width	S2	总宽度	Overall Width
H1	最大起升高度	Max. Lifting Height	H	总高度	Overall Height
H2	净高	Clear Height	D	最大吊点间距	Max. Hook Space
/	吊装物料介绍	Lifting material details	/	地面坡度	Ground Slope____%
V/Hz/Ph	供电电压	Power Voltage	/	地面材料（混凝土/ 沥青/夯实的土地？）	Ground material (concrete or asphalt or compacted soil?)
Unit	起重机数量	Quantity of crane	/	操作方式: 遥控/司机室	Operation: Remote control or Cabin

MAGICART

>>> 技术特点及参数表 Technical Features & Data Sheet



产品特征

- **顶部开放式结构和侧面多吊点设计**
- 适用各种物料起吊、长度或宽度较大的物品
- 灵活的可移动性，可在工厂和车间自由穿梭
- 起吊、运输等多种用途
- 宽度，高度的定制设计
- 载荷从 15吨~1, 000 吨
- 全液压系统 或 全电动系统
- 柴油发动机供电 /可选电缆接入
- 驾驶室控制，可配无线遥控器

Features

- **Top-open structure with multiple lateral hooks**
- Designed for Longitudinal material & Various object，such as Yacht /Boat / Pipe etc.
- High mobility to move in yard, even go through a workshop gate
- Multi-purpose for lifting & transportation
- Customized design for Width, Height
- Capacity from 15 t ~ 1,000 t
- Full hydraulic system or electric system
- Diesel engine power/optional for cable access
- Cabin operation or wireless control



型号 Model	载荷 Capacity	净高 Clear Height	净宽 Clear Width
BH 15	15T	2m ~ 9m	3m ~ 12m
BH 30	30T	2m ~ 9m	3m ~ 12m
BH 50	50T	2m ~ 9m	3m ~ 12m
BH 100	100T	2.5m ~ 12m	3m ~ 15m
BH 150	150T	2.5m ~ 12m	3m ~ 15m
BH 200	200T	2.5m ~ 12m	3m ~ 15m
BH 300	300T	3m ~ 15m	3m ~ 16m
BH 400	400T	3m ~ 15m	3m ~ 16m
BH 500	500T	3m ~ 16m	3m ~ 18m
BH 600	600T	5m ~ 16m	5m ~ 18m
BH 750	750T	5m ~ 16m	5m ~ 18m
BH 900	900T	5m ~ 18m	5m ~ 20m
BH 1000	1000T	5m ~ 18m	5m ~ 20m
可定制 Customized	可定制 Customized	可定制 Customized	可定制 Customized

MAGICART


>>> 集装箱跨运车 - EL 型号
Container Straddle Carrier - EL model


◆ 型号说明 Model Code

EL 40t - 4.2m - 4.7m A4

- A4 — 工作级别 Crane Class（ISO/GB/FEM）
- 4.7m — 起升高度 Lifting Height
- 4.2m — 跨度 Span
- 40t — 起重量 Lifting Capacity（SWL）
- EL — EL 集装箱跨运车 Container Straddle Carrier

◆ 尺寸布局图 Layout Drawing

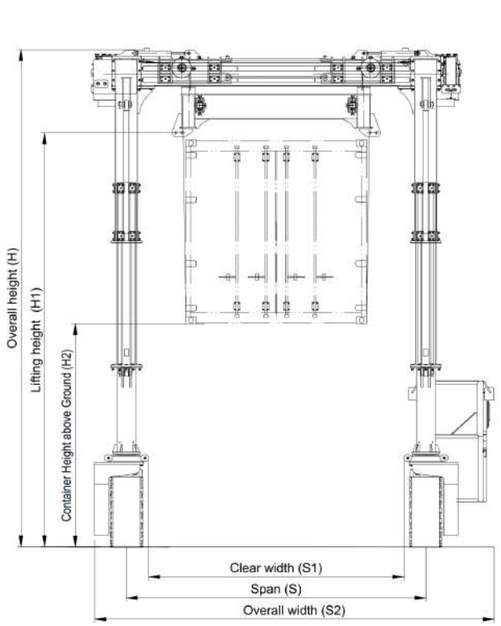

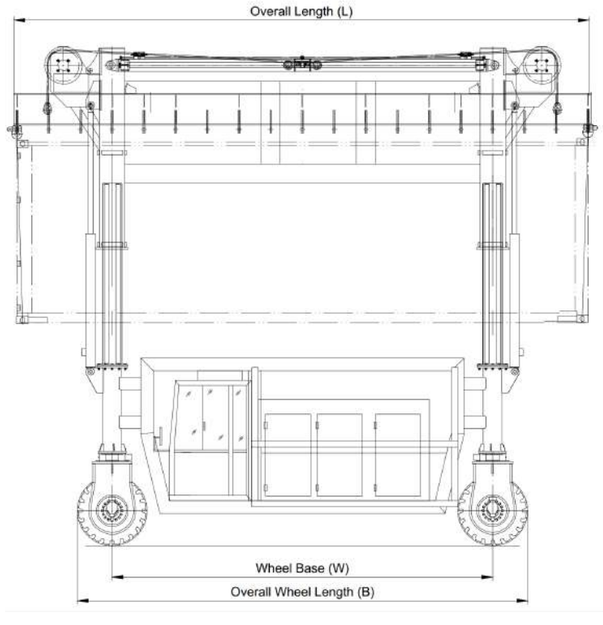

>>> 报价所需的必备信息 Info needed from client for offer			>>>更多有效信息（如有） More info needed from client if available		
SWL	额定载荷	Lifting capacity	S2	总宽度	Overall Width
S1	净宽	Clear Width	H	总高度	Overall Height
H1	最大起升高度	Max. Lifting Height	H2	集装箱离地高度	Container Height above Ground
/	集装箱尺寸	Container Size	/	地面坡度	Ground Slope____%
V/Hz/Ph	供电电压	Power Voltage	/	地面材料（混凝土/ 沥青/ 夯实的土地？）	Ground material (concrete or asphalt or compacted soil?)
Unit	起重机数量	Quantity of crane	/	操作方式: 遥控/司机室	Operation: Remote control or Cabin

MAGICART

>>> 技术特点及参数表 Technical Features & Data Sheet



产品特征

- **可伸缩升降，配专用吊具**
- 适用于ISO标准20ft, 40ft, 45ft, 50ft 集装箱, 电池储能集装箱等
- 灵活的可移动性，可在工厂和车间自由穿梭
- 起吊、运输等多种用途
- 宽度，高度的定制设计
- 载荷从 12吨 ~ 80吨
- 全液压系统 或 全电动系统
- 柴油发动机供电 /可选电缆接入
- 驾驶室控制，可配无线遥控器
- 选配：电池供电

Features

- **Telescopic lifting with spreader**
- Designed for ISO standard 20ft, 40ft, 45ft, 50ft containers, Battery Energy Storage System etc
- High mobility to move in yard, even go through a workshop gate
- Multi-purpose for lifting & transportation
- Customized design for Width, Height
- **Capacity from 12 t ~ 100 t**
- Full hydraulic system or electric system
- Diesel engine power/optional for cable access
- Cabin operation or wireless control
- ·Option: power supplied by Battery



型号 Model	载荷 Capacity	起升高度 Lifting Height	净宽 Clear Width
EL 12	12T	4.4m / 6.1m	3.2m / 3.5m
EL 30	30T	4.4m / 6.1m	3.5m
EL 35	35T	4.4m / 6.1m	3.5m
EL 40	40T	4.4m / 6.1m	3.5m
EL 60	60T	4.4m / 6.1m	3.5m
EL 80	80T	4.4m / 6.3m	3.5m
EL100	100T	4.4m / 6.3m	3.5m
可定制 Customized	可定制 Customized	可定制 Customized	可定制 Customized


>>> 双梁轮胎吊 - GRT 型号
Double Girder RTG Crane - GRT model

◆ 型号说明 Model Code

GRT 75t - 12m - 9m A5

- A5 — 工作级别 Crane Class（ISO/GB/FEM）
- 9m — 起升高度 Lifting Height
- 12m — 跨度 Span
- 75t — 起重量 Lifting Capacity（SWL）
- GRT — GRT 双梁单吊钩 Double Beam with Spreader

◆ 尺寸布局图 Layout Drawing

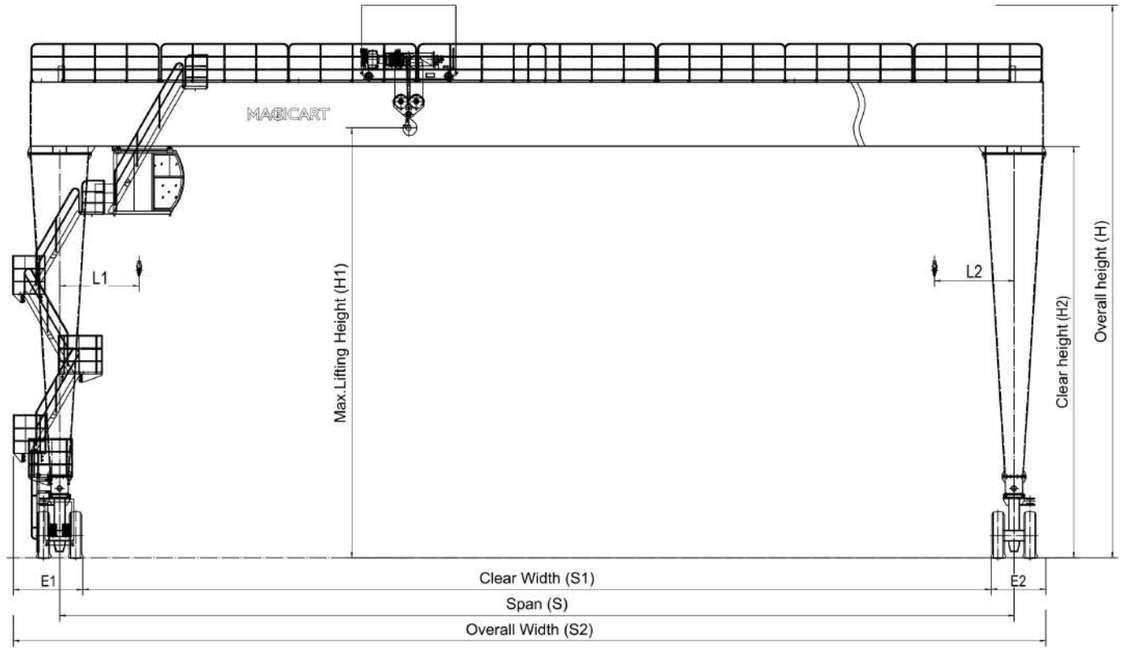

>>> 报价所需的必备信息 Info needed from client for offer			>>>更多有效信息（如有） More info needed from client if available		
SWL	额定载荷	Lifting capacity	/	是否需要副钩	Aux. Hook needed or not
S	跨度	Span	S2	总宽度	Overall Width
H1	最大起升高度	Max. Lifting Height	H	总高度	Overall Height
/	每日工作时长	Working Hours per	/	地面坡度	Ground Slope____%
V/Hz/Ph	供电电压	Power Voltage	/	地面材料（混凝土/沥青/夯实的土地？）	Ground material (concrete or asphalt or compacted soil?)
Unit	起重机数量	Quantity of crane	/	操作方式: 遥控/司机室	Operation: Remote control or Cabin

MAGICART

>>> 技术特点及参数表 Technical Features & Data Sheet



型号 Model	额定载荷 Lifting Capacity	最大起升高度 Max Lifting Height	跨度 Span
GRT 10	10T	3m ~ 9m	3m ~ 35m
GRT 20	20T	3m ~ 9m	3m ~ 35m
GRT 30	30T	3m ~ 12m	3m ~ 35m
GRT 50	50T	3m ~ 12m	3m ~ 35m
GRT 70	70T	3m ~ 12m	3m ~ 35m
GRT 100	70T	5m ~ 15m	5m ~ 35m
GRT 120	120T	5m ~ 15m	5m ~ 35m
GRT 150	150T	5m ~ 15m	5m ~ 35m
GRT 200	200T	3m ~ 15m	5m ~ 35m
GRT 250	250T	3m ~ 20m	5m ~ 35m
GRT 300	300T	5m ~ 20m	5m ~ 35m
GRT 400	400T	5m ~ 20m	5m ~ 35m
可定制 Customized	可定制 Customized	可定制 Customized	可定制 Customized

产品特征

- A 型门架结构 —— 设计稳固，额定载荷 10t～400t
- 电液驱动设计，提升起重机工况适应性
- 可配置单小车或双小车
- 可选配副钩（5 吨～50 吨），用于轻型物料吊运
- 采用 Q355 高强度钢制作
- 全程无级调速，运行更安全平稳
- PLC 控制，搭载 MAGICART 定制程序
- 配置风速传感器、过载保护、起升高度限位及行走限位保护
- 供电方式：柴油发电机组供电或外接电缆供电
- 夜间作业照明系统

Features

- A type gantry frame— stable design, capacity 10t~400t
- Electric & hydraulic drive design to increase crane's adaptability
- Can equip with one or two trolley,
- Auxiliary hook (5t~50t)for light material handling is available
- Fabricated by High-strength steel material Q355
- Full stepless speed control, more safe and stable
- Controlled by PLC with MAGICART customized program
- Wind sensor, Overload protection, Height limit & travel limit protection
- Powered by a diesel genset or electric cable access
- Night working light system

>>> 定制化起升系统 Customized Lifting System



产品特征

- 多功能起吊的特殊设计
- 适用各种特殊形状的或者在起吊和翻转上有特殊要求的物品
- 灵活的可移动性，可在工厂和车间自由穿梭
- 起吊、运输等多种用途
- 宽度，高度的定制设计
- 载荷从 10吨~400吨
- 全液压系统
- 柴油发动机供电 /可选电缆接入
- 驾驶室控制，可配无线遥控器

Features

- Special design with multiple lifting functions
- Designed for various material with special shape for special demand in lifting and turn over
- High mobility to move in yard, even go through a workshop gate
- Multi-purpose for lifting & transportation
- Customized design for width, height
- Capacity from 10 t ~ 400 t
- Full hydraulic system
- Design engine power/optional for cable access
- Cabin operation or wireless control

>>> 定制化的伸缩设计 Customized Telescopic Design



产品特征

- 载荷从10吨∽350吨
- 宽度，高度的定制设计
- 全液压系统
- 柴油发动机功率 /可选电缆接入
- 驾驶室控制，可配无线遥控器

Features

- Capacity from 10 t ~ 350 t
- Customized design for Width, Height
- Full hydraulic system
- Diesel engine power/optional for cable access
- Cabin operation or wireless control

产品特征

- 可伸缩高度和跨度设计
- 适用与较低的车间和大门
- 灵活的可移动性，可在工厂和车间自由穿梭
- 起吊、运输等多种用途

Features

- Telescopic legs or Telescopic Beam design
- Designed for matching low workshop gate
- High mobility to move in yard, even go through a workshop gate
- Multi-purpose for lifting & transportation



>>> 电动便携式龙门吊 Electric Portable Gantry



产品特征

- 驱动：电动升降/小车运行，电动运行或手推
- 载荷：0.5-10t，可定制
- 跨度：2-10m，可定制
- 起升高度：2-10m，可定制
- 选配：可伸缩调节的高度

Features

- Drive type: electric lifting / trolley crossing, electric travel or manual pushing
- Loading capacity: 0.5~10t, customized
- Span: 2~10 m, customized
- Lifting Height: 2~10 m, customized
- Option: adjustable height (telescopic)

为何选择魔工？Why choose MAGICART

高科技优势

- 先进的起重机结构设计技术
- 领先的电控和液压控制系统

High-Tech Advantages

- Advanced technology in crane structure design
- Advanced electric & hydraulic control system





可靠的快速服务

- 问题解决优先的公司制度
- 专业且快速的服务行动 (部件无条件供应)

Reliable Fast Services

- Solve-trouble firstly in company rules
- Professional & fast action in service (unconditional parts supplies in advance)


优秀的性能

- 出厂前 100%检验与测试
- 持续的性能优化计划

Excellent Performance

- 100% performance tested in factory
- Continuous performance optimized plan



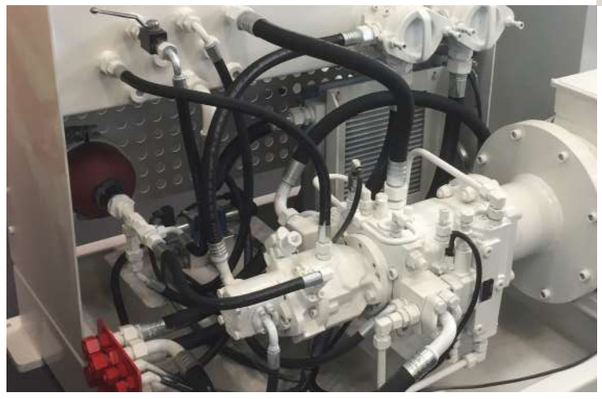

有保障的质量

- 各机构选用高质量的部件
- 标配2年的质保期

Guaranteed Quality

- Qualified components for every part
- Standard 2 years warranty policy

提 升 客 户 的 事 业
PROMOTE CLIENT'S BUSINESS

MAGICART



新乡市魔工起重机有限公司
XINXIANG MAGICART CRANES CO., LTD
info@magicartcranes.com
Tel: +86 173 3736 9287
www.magicartcranes.com

地址：河南省新乡市红旗区金穗大道跨境贸易大厦1903
Add: 1903, Cross-border Trade Building, Jinsui Road, Hongqi District, Xinxiang City, Henan, China